




3 3/4" (95mm) aperture
Gimbal
ES/ESD16

Lytecaster
Recessed Downlight

330X

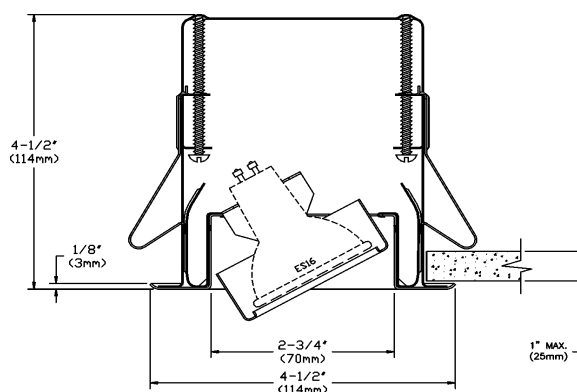

Complete fixture consists of Reflector Trim & Frame-in Kit. Select each separately

REFLECTOR TRIM

330ABX	Antique Brass Plated
330ALX	Aluminum Paint
330BKX	Black Paint
330CMX	Chrome Plated
330GKX	24k Gold Plated
330SBX	Satin Brass Plated
330STX	Stainless Steel Plated
330WHX	White Paint

FRAME-IN-KIT

REMODELER	300ESX
NON-IC	302ESX
IC	302ESICX
AIR SEAL / IC	302ESAICX

LAMP

50W ES/ESD16 (GZ10)
50W ES/ESD16 (GZ10)
50W ES/ESD16 (GZ10)
50W ES/ESD16 (GZ10)

Features

Housing : 25ga galvanized steel.

Residence Mounting Clip : Factory-installed ; zinc plated spring steel ; free-hand installation. (patent # 2,184, 149)

Flange Housing : Cold rolled steel 22ga.

Adjustable Lampholder Support : 27ga. steel ; Rotates 358° horizontally and 0° to 20° vertically.

Mounting Clips (2) : 24ga. spring steel, zinc plated. Provide easy snap-in / snap-out action.

Frame-In Kit

Note : For complete Frame-In Kit specifications, see 300 frame specification sheets

Labels : CSA , UL

Suitable for damp locations.

WE RESERVE THE RIGHT TO CHANGE DETAILS OF DESIGN, MATERIALS AND FINISH, IN ANY WAY THAT WILL NOT ALTER INSTALLED APPEARANCE OR REDUCE FUNCTION AND PERFORMANCE.





Lightolier CFI, 3015 Louis Amos Lachine, (Quebec) H8T 1C4

LIGHTOLIER®

(FC) is initial footcandles at center of beam.
Beam length (L) and beam width (W) are to
where the candlepower is reduced to 50% of
center beam candlepower.

CBCP is center beam candlepower.
(C) is distance to the center of the beam.

Lamp data shown is typical, and is based on bare
lamp photometrics. Contact lamp manufacturers for
availability and performance.



Lamps	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0° AIMING ANGLE				30° AIMING ANGLE				30° AIMING ANGLE				45° AIMING ANGLE						
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
MR-16 LOW VOLTAGE HALOGEN BI-PIN LAMPS																						
	7°	8200	3000	7'	167	0.9'	0.9'	6'	3.5'	148	1.0'	0.8'	2'	3.5'	256	1.0'	0.5'	4'	4.0'	181	1.0'	0.7'
20W MR-16 VNSP (EZ)				10'	82	1.2'	1.2'	9'	5.2'	66	1.5'	1.3'	3'	5.2'	114	1.5'	0.7'	6'	6.0'	81	1.5'	1.0'
				13'	49	1.6'	1.6'	12'	6.9'	37	2.0'	1.7'	4'	6.9'	84	2.0'	1.0'	8'	8.0'	45	2.0'	1.4'
				16'	32	2.0'	2.0'	15'	8.7'	24	2.3'	2.1'	5'	8.7'	41	2.5'	1.2'	10'	10.0'	29	2.5'	1.7'
	13°	3600	3000	6'	100	1.4'	1.4'	5'	2.9'	94	1.5'	1.3'	2'	3.5'	113	1.9'	0.9'	3'	3.0	141	1.4'	1.0'
20W MR-16 NSP (ES)				8'	56	1.8'	1.8'	7'	4.0'	48	2.1'	1.8'	3'	5.2'	50	2.8'	1.4'	5'	5.0	51	2.3'	1.6'
				10'	36	2.3'	2.3'	9'	5.2'	29	2.7'	2.4'	4'	6.9'	28	3.8'	1.8'	7'	7.0'	26	3.2'	2.3'
				12'	25	2.7'	2.7'	11'	6.4'	19	3.4'	2.9'	5'	8.7'	18	4.7'	2.3'	9'	9.0'	16	4.2'	2.9'
	40°	525	4000	2'	131	1.5'	1.5'	2'	1.2'	85	2.0'	1.7'	1'	1.7'	66	4.8'	1.5'	2'	2.0'	46	3.4'	2.1'
20W MR-16 FL (BAB)				3'	58	2.2'	2.2'	3'	1.7'	38	3.0'	2.5'	2'	3.5'	16	9.7'	2.9'	3'	3.0'	21	5.0'	3.1'
				4'	33	2.9'	2.9'	4'	2.3'	21	4.1'	3.4'	3'	5.2'	7	14.5'	4.4'	4'	4.0'	12	6.7'	4.1'
				5'	21	3.6'	3.6'	5'	2.9'	14	5.1'	4.2'	4'	6.9'	4	19.3'	5.8'	5'	5.0'	7	8.4'	5.1'
	12°	8700	4000	7'	178	1.5'	1.5'	6'	3.5'	157	1.7'	1.5'	2'	3.5'	272	1.7'	0.8'	4'	4.0'	192	1.7'	1.2'
35W MR-16 NSP (FRB)				10'	87	2.1'	2.1'	9'	5.2'	70	2.5'	2.2'	3'	5.2'	121	2.6'	1.3'	6'	6.0'	85	2.6'	1.8'
				13'	51	2.7'	2.7'	12'	6.9'	39	3.4'	2.9'	4'	6.9'	68	3.5'	1.7'	8'	8.0'	48	3.4'	2.4'
				16'	34	3.4'	3.4'	15'	8.7'	25	4.2'	3.6'	5'	8.7'	44	4.3'	2.1'	10'	10.0'	31	4.3'	3.0'
	20°	3900	4000	6'	108	2.1'	2.1'	5'	2.9'	101	2.4'	2.0'	2'	3.5'	122	3.1'	1.4'	3'	3.0	153	2.7'	1.5'
35W MR-16 SP (FRA)				8'	61	2.8'	2.8'	7'	4.0'	52	3.3'	2.9'	4'	6.9'	54	4.7'	2.1'	5'	5.0'	55	3.6'	2.5'
				10'	39	3.5'	3.5'	9'	5.2'	31	4.3'	3.7'	5'	8.7'	30	6.2'	2.8'	7'	7.0'	28	5.1'	3.9'
				12'	27	4.2'	4.2'	11'	6.4'	21	5.2'	4.5'	6'	8.7'	20	7.8'	3.5'	9'	9.0'	17	6.6'	4.5'
	40°	1600	4000	4'	100	2.9'	2.9'	3'	1.7'	115	3.0'	2.5'	1'	1.7'	200	4.8'	1.5'	3'	3.0	63	5.0'	3.1'
35W MR-16 FL (FMW)				6'	44	4.4'	4.4'	5'	2.9'	42	5.1'	4.2'	2'	3.5'	50	9.7'	2.9'	4'	4.0	35	6.7'	4.1'
				8'	25	5.8'	5.8'	7'	4.0'	21	7.1'	5.8'	3'	5.2'	22	14.5'	4.4'	5'	5.0'	23	8.4'	5.1'
				10'	16	7.3'	7.3'	9'	5.2'	13	9.1'	7.6'	4'	6.9'	13	19.3'	5.8'	6'	6.0'	16	10.1'	6.2'
	10°	11500	4000	6'	180	1.4'	1.4'	7'	4.0'	152	1.6'	1.4'	3'	5.2'	160	2.1'	1.0'	5'	5.0'	183	1.8'	1.2'
37W MR-16 IR (NSP)				12'	80	2.1'	2.1'	10'	5.8'	75	2.3'	2.0'	4'	6.9'	90	2.9'	1.4'	7'	7.0'	83	2.5'	1.7'
				16'	45	2.8'	2.8'	13'	7.5'	44	3.0'	2.8'	5'	8.7'	58	3.6'	1.7'	9'	9.0'	50	3.2'	2.2'
				20'	29	3.5'	3.5'	16'	9.2'	29	3.7'	3.2'	6'	10.4'	40	4.3'	2.1'	11'	11.0'	34	3.9'	2.7'
	25°	3500	4000	6'	97	2.7'	2.7'	5'	2.9'	91	3.0'	2.6'	2'	3.5'	109	4.2'	1.8'	3'	3.0'	137	2.8'	1.6'
37W MR-16 IR (NFL)				8'	55	3.5'	3.5'	7'	4.0'	46	4.2'	3.6'	3'	5.2'	49	6.2'	2.7'	5'	5.0'	49	4.7'	3.1'
				10'	35	4.4'	4.4'	9'	5.2'	28	5.4'	4.6'	4'	6.9'	27	8.5'	3.5'	7'	7.0'	25	6.5'	4.4'
				12'	24	5.3'	5.3'	11'	6.4'	19	6.6'	5.6'	5'	8.7'	18	10.4'	4.4'	9'	9.0'	15	8.4'	5.6'
	40°	2050	4000	4'	128	2.9'	2.9'	3'	1.7'	148	3.0'	2.5'	1'	1.7'	258	4.8'	1.5'	3'	3.0'	61	5.0'	3.1'
37W MR-16 IR (FL)				6'	57	4.4'	4.4'	5'	2.9'	53	5.1'	4.2'	2'	3.5'	64	9.7'	2.9'	4'	4.0	45	6.7'	4.1'
				8'	32	5.8'	5.8'	7'	4.0'	27	7.1'	5.9'	3'	5.2'	28	14.5'	4.4'	5'	5.0'	29	8.4'	5.1'
				10'	21	7.3'	7.3'	9'	5.2'	16	9.1'	7.6'	4'	6.9'	16	19.3'	5.8'	6'	6.0'	20	10.1'	6.2'
	9°	13,100	3500	8'	205	1.3'	1.3'	7'	4.0'	174	1.5'	1.3'	3'	5.2'	182	1.9'	0.9'	5'	5.0	185	1.6'	1.1'
42W MR-16 VNSP (EZY)				12'	91	1.9'	1.9'	10'	5.8'	85	2.1'	1.8'	4'	6.9'	102	2.5'	1.3'	7'	7.0	96	2.2'	1.6'
				16'	51	2.5'	2.5'	13'	7.5'	50	2.7'	2.4'	5'	8.7'	66	3.2'	1.6'	9'	9.0'	57	2.8'	2.0'
				20'	33	3.1'	3.1'	16'	9.2'	33	3.4'	2.9'	6'	10.4'	45	3.8'	1.9'	11'	11.0'	38	3.5'	2.4'
	27°	2400	4000	4'	150	1.9'	1.9'	3'	1.7'	173	2.0'	1.7'	1'	1.7'	300	2.3'	1.0'	3'	3.0	94	3.1'	2.0'
42W MR-16 NFL (EYS)				6'	67	2.9'	2.9'	5'	2.9'	62	3.3'	2.8'	2'	3.5'	75	4.6'	1.9'	4'	4.0	53	4.1'	2.7'
				8'	38	3.8'	3.8'	7'	4.0'	32	4.6'	3.9'	3'	5.2'	33	7.0'	2.9'	5'	5.0'	34	5.1'	3.4'
				10'	24	4.8'	4.8'	9'	5.2'	19	5.9'	5.0'	4'	6.9'	19	9.3'	3.6'	6'	6.0'	24	6.1'	4.1'
	14°	10,200	4000	8'	159	2.0'	2.0'	7'	4.0'	135	2.3'	2.0'	3'	5.2'	142	3.1'	1.5'	5'	5.0'	144	2.5'	1.7'
50W MR-16 NSP (EXT)				12'	71	2.9'	2.9'	10'	5.8'	66	3.3'	2.8'	4'	6.9'	80	4.1'	2.0'	7'	7.0'	74	3.5'	2.4'
				16'	40	3.8'	3.8'	13'	7.5'	39	4.3'	3.7'	5'	8.7'	51	5.1'	2.5'	9'	9.0'	45	4.5'	3.1'
				20'	26	4.9'	4.9'	15'	9.2'	28	5.3'	4.5'	6'	10.4'	35	6.2'	2.9'	11'	11.0'	30	5.5'	3.8'
	27°	3400	4000	6'	94	2.9'	2.9'	5'	2.9'	88	3.3'	2.8'	2'	3.5'	106	4.6'	1.9'	3'	3.0'	134	3.1'	2.0'
50W MR-16 NFL (EXZ)				8'	53	3.8'	3.8'	7'	4.0'	45	4.6'	3.9'	3'	5.2'	47	7.0'	2.9'	4'	4.0	48	5.1'	3.4'
				10'	34	4.8'	4.8'	9'	5.2'	27	5.9'	5.0'	4'	6.9'	27	9.3'	3.6'	7'	7.0'	25	7.1'	4.8'
				12'	24	5.8'	5.8'	11'	6.4'	18	7.2'	6.1'	5'	8.7'	17	11.6'	4.8'	9'	9.0'	15	9.2'	6.1'
	40°	1850	4000	4'	116	2.9'	2.9'	3'	1.7'	134	3.0'	2.5'	1'	1.7'	231	4.8'	1.5'	3'	3.0	73	5.0'	3.1'
50W MR-16 FL (EXN)				6'	51	4.4'	4.4'	5'	2.9'	48	5.1'	4.2'	2'	3.5'	58	9.7'	2.9'	4'	4.0	41	6.7'	4.1'
				8'	29	5.8'	5.8'	7'	4.0'	25	7.1'	5.9'	3'	5.2'	26	14.5'	4.4'	5'	5.0'	26	8.4'	5.1'
				10'	19	7.3'	7.3'	9'	5.2'	15	9.1'	7.6'	4'	6.9'	14	19.3'	5.8'	6'	6.0'	18	10.1'	6.2'
	55°	1150	4000	3'	126	3.1'	3.1'	3'	1.7'	83	4.6'	3.6'	2'	3.5'	94	22.3'	2.1'	2'	2.0'	102	5.7'	2.9'
50W MR-16 WFL (FNV)				5'	46	5.2'	5.2'	5'	2.9'	30	7.6'	6.0'	2'	3.5'	36	44.5'	4.2'	3'	3.0'	45	8.6'	4.4'
				7'	23	7.3'	7.3'	7'	4.0'	15	10.7'	8.4'	3'	5.2'	16	66.8'	6.2'	4'	4.0	25	11.4'	5.9'
				9'	14	9.4'	9.4'	9'	5.2'	9	13.7'	10.8'	4'	6.9'	9	89.1'	8.3'	5'	5.0'	16	14.3'	7.4'
	10°	14000	7000	12'	97	1.4'	1.4'	10'	5.8'	91	2.3'	2.0'	3'	5.2'	194	2.1'	1.0'	5'	5.0'	198	1.8'	1.2'
73W MR-16 SP				18'	56	2.8'	2.8'	13'	7.5'	54	3.0'	2.6'	5'	8.7'	70	3.6'	1.7'	7'	7.0'	101	2.5'	1.7'
				20'	35	3.5'	3.5'	16'	9.2'	36	3.7'	3.2'	6'	10.4'	49	4.3'	2.1'	9'	9.0'	61	3.2'	2.5'
	36°	2500	4000	4'	156	2.5'	2.6'	3'	1.7'	180	2.7'	2.3'	1'	1.7'	313	3.8'	1.3'	3'	3.0	98	4.4'	2.8'
73W MR-16 FL				6'	59	3.8'	3.8'	5'	2.9'	65	4.5'	3.8'	2'	3.5'	78	5.5'	2.6'	4'	4.0	55	5.8'	3.7'
				8'	39	5.2'	5.2'	7'	4.0'	33	6.3'	5.3'	3'	5.2'	35	11.4'	3.9'	5'	5.0	35	7.3'	4.6'
				10'	25	6.5'	6.5'	9'	5.2'	20	6.1'	6.6'	4'	6.9'	20	15.2'	5.2'	6'	6.0	25	6.7'	5.5'
	14°	12,000	4000	8'	188	2.0'	2.0'	7'	4.0'	159	2.3'	2.0'	3'	5.2'	167	3.1'	1.5'	5'	5.0'	170	2.5'	1.7'
75W MR-16 NSP (FVFL)				12'	83	2.9'	2.9'	10'	5.8'	78	3.3'	2.8'	4'	6.9'	94	4.1'	2.0'	7'	7.0'	87	3.5'	2.4'
				16'	47	3.9'	3.9'	13'	7.5'	40	4.3'	3.7'	5'	8.7'	60	5.1'	2.5'	9'	9.0'	52	4.5'	3.1'